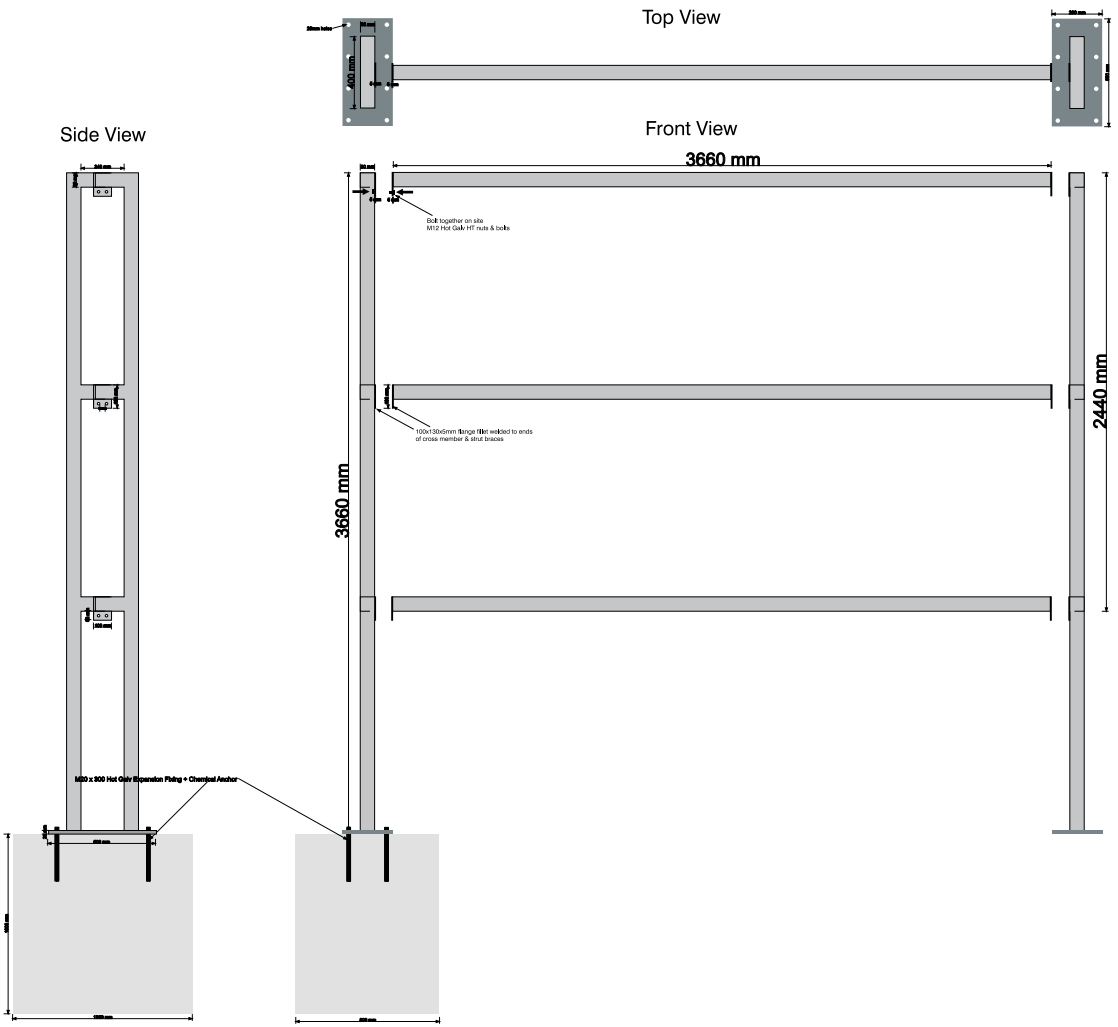
Top View
Side View
Front View
3660 mm
Bolt together on site
M12 Hot Galv HT nuts & bolts
100x130x5mm flange fillet welded to ends
of cross member & strut braces
3660 mm
2440 mm
M20 x 300 Hot Galv Expansion Fixing + Chemical Anchor